


# Series 1000

- Pressure Washing • Washdown
- Spray Operations • Air

**To handle single 1/4", 3/8" or 1/2" I.D. hose.**

- Lightweight, compact with an e-coated frame.
- Direct crank rewind permanently attached.
- Adjustable cam-lock brake standard.
- Exterior mounting holes for easier installation.
- Redesigned (and field installable) pin lock.
- Standard inlet: 90° ball bearing swivel joint, 1/2" female NPT threads.
- Standard outlet: 3/8" female NPT threads, 1/2" available upon request.
- Pressures to 3000 psi (207 bar).
- Temperatures from +20°F to +400°F (-7°C to +204°C).

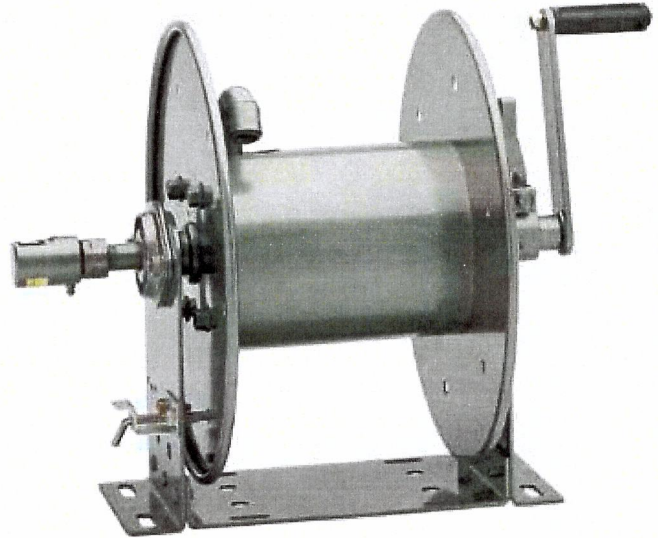

Standard configuration shown with optional pin lock

**PARTS DRAWING – ISO 165**

Model Number	Hose Capacity of Reel feet m				Approx. Weight Crank Rewind lb. kg			Reel Dimensions*** in. mm			
	I.D. in.	1/4	3/8	1/2	NET	UPS/ FedEx SHIP Wt.	Freight SHIP Wt.	A	B	F	X
	mm	6	10	13							
	O.D. in.	5/8	3/4	7/8							
	mm	16	19	22							
<b>1014-14-16</b>		<b>100</b>	<b>75</b>	<b>40</b>	<b>23</b>	<b>42*</b>	<b>58</b>	<b>11.5</b>	<b>6</b>	<b>18.5</b>	<b>10</b>
		31	23	12	10	19	26	292	152	470	254
<b>1016-14-16</b>		<b>150</b>	<b>100</b>	<b>70</b>	<b>24</b>	<b>42*</b>	<b>59</b>	<b>13.5</b>	<b>8</b>	<b>20.5</b>	<b>12</b>
		46	31	21	11	19	27	343	203	521	305
<b>1020-14-16</b>		<b>250</b>	<b>175</b>	<b>100</b>	<b>25</b>	<b>42*</b>	<b>60</b>	<b>17.5</b>	<b>12</b>	<b>24.5</b>	<b>16</b>
		76	53	30	11	19	27	445	305	622	406

**Notes:**

1. Specifications subject to change.
2. Other sizes, from standard components, available on request.
3. **Finish:** Refer to page 3.
4. **Be sure to check dimensions and weights prior to ordering.**

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\* Dimensional weight may apply when shipped as a parcel package (via FedEx or UPS Ground).

\*\*\* X, Y indicate mounting holes. See page 5.

